

INVITATION TO TENDER
Ref: GYSBI ITT001
FENCING FOR CAMP SITE FACILITIES
SCOPE OF WORK

1. DESCRIPTION OF WORK – GENERAL

Except as otherwise expressly provided herein, Contractor shall supply all adequate and competent labor, supervision, tools, equipment, installed and consumable materials, services, testing devices and each item of expense necessary for the handling, hauling, prefabrication, field erection, installation, construction, assembly, evaluation, and quality assurance of the Fencing around Camp Site Facilities at GTE IPS Project Site, WBD Reynestein, hereinafter called the Work.

Project Description

Contractor to provide Company (GYSBI) fencing around Camp Facilities:

1. Supply and installation of 684' long, 8' tall chain link fencing with snake guard, 48" high from ground level.
 - a. Snake guard mesh to be attached to the chain link material, guy wires and posts with stainless steel tie wire (these will be supplied by GYSBI free of cost to contractor). Chain link material to be 8' tall, snake guard is overlaid and installed onto it.
2. Including 1 personal gate with cypher combination (mechanical) lock set and one opening without gates.
3. The Contractor to supply and install all parts of the fence – foundation, poles, braces, chain link material, etc. as shown on the attached detailed design.

Work to be coordinated with the currently ongoing GTE Early Works activities by GYSBI.

2. SPECIFICATIONS, DRAWINGS, ATTACHMENTS AND EXHIBITS

All Work shall be performed in accordance with the following described specifications, drawings and other documents, which by reference are made a part hereof.

Drawing No.	Drawing Name	Drawing Date
	ISP Site Plan – Camp Area r4	28 June 2023
	ISP Site Plan - Camp Area - Details r1	28 June 2023
	Snake guard mesh specifications	

3. DESCRIPTION OF WORK – SPECIFIC

The Work described in Articles 1.0 and 2.0 shall include, but not be limited to, the following:

- 3.1 Before submittal of the proposal site visit is required, to assess the project.
- 3.2 HSE representative of Contractor to be present on the work site all the time when project is ongoing.
- 3.3 Contractor to submit work schedule with the proposal (the estimated time to complete the task as a minimum).
- 3.4 Risk assessment (RAMS) to be submitted by Contractor for review and approval for each type of work on the site. After RAMS is approved, work permit can be opened. Works without permit are strictly prohibited on the site.
- 3.5 Company will NOT supply and material, labor, equipment or any other resources to Contractor, except the snake guard mesh with stainless steel tie wire.
- 3.6 Contractor shall mobilize all resources necessary to adequately perform the work.
- 3.7 Leaks and other major issues may require removal of the tool or equipment from the premises at Company's discretion.
- 3.8 Contractor shall store materials in a safe and orderly manner. In case the contractor wishes to mobilize temporary facilities, these must be white or white with blue trims.
- 3.9 Contractor shall provide suitable barricades or other means to prevent unauthorized entry into the Work area.
- 3.10 Contractor is responsible to provide to all workers involved in project minimum PPE as per GYSBI policy as well as snake gaiters.
- 3.11 All workers involved in the project are required to complete one day GYSBI training.
- 3.12 Contractor is required to install the fencing as shown on the attached design, completed and handed over to Company.
- 3.13 All surfaces to be zinc plated or galvanized.
- 3.14 Top of posts to be capped off to prevent rain entering the structure. No open ends are allowed.
- 3.15 All weld seams to be primed and zinc painted.
- 3.16 Corner and end post to be tied back with and angle strut into a concrete foundation block to provide structural strength. Braces and ties are required periodically to maintain structural integrity (no wobbling, leaning, movement is allowed).
- 3.17 Chain link material should be supported with a guy wire at least at the top of the snake guard mesh.
- 3.18 Contractor shall remove all equipment, tools and materials and leave the site in a clean, orderly fashion upon demobilization.
- 3.19 Contractor is allowed to mobilize a white (blue trims allowed) office/breakroom trailer for the duration of works. Tent, shacks, shed are not allowed at the job site.

4. MATERIAL, EQUIPMENT OR SERVICES FURNISHED BY COMPANY

Company will furnish the 48" wide snake guard mesh material and 0.032" stainless steel tie wire for the Work. Contractor shall install this according to Company's instructions. No other materials to be supplied by Company.


5. INSTRUCTIONS TO BIDDERS

1. Proposals are to be submitted along **Valid Business Registration or equivalent, Valid GRA & NIS Compliance, Local Content Certificate.**
2. Proposal and documents must be submitted to the e-mail address below **on or before July 18th, 2023.**

Email: tenders@gysbi.com

Camp Area

Legend


Sidewalk physical barrier 

Fenceline 

Border of graveled areas 

Units: centimeters [Standard]

7468 [245]

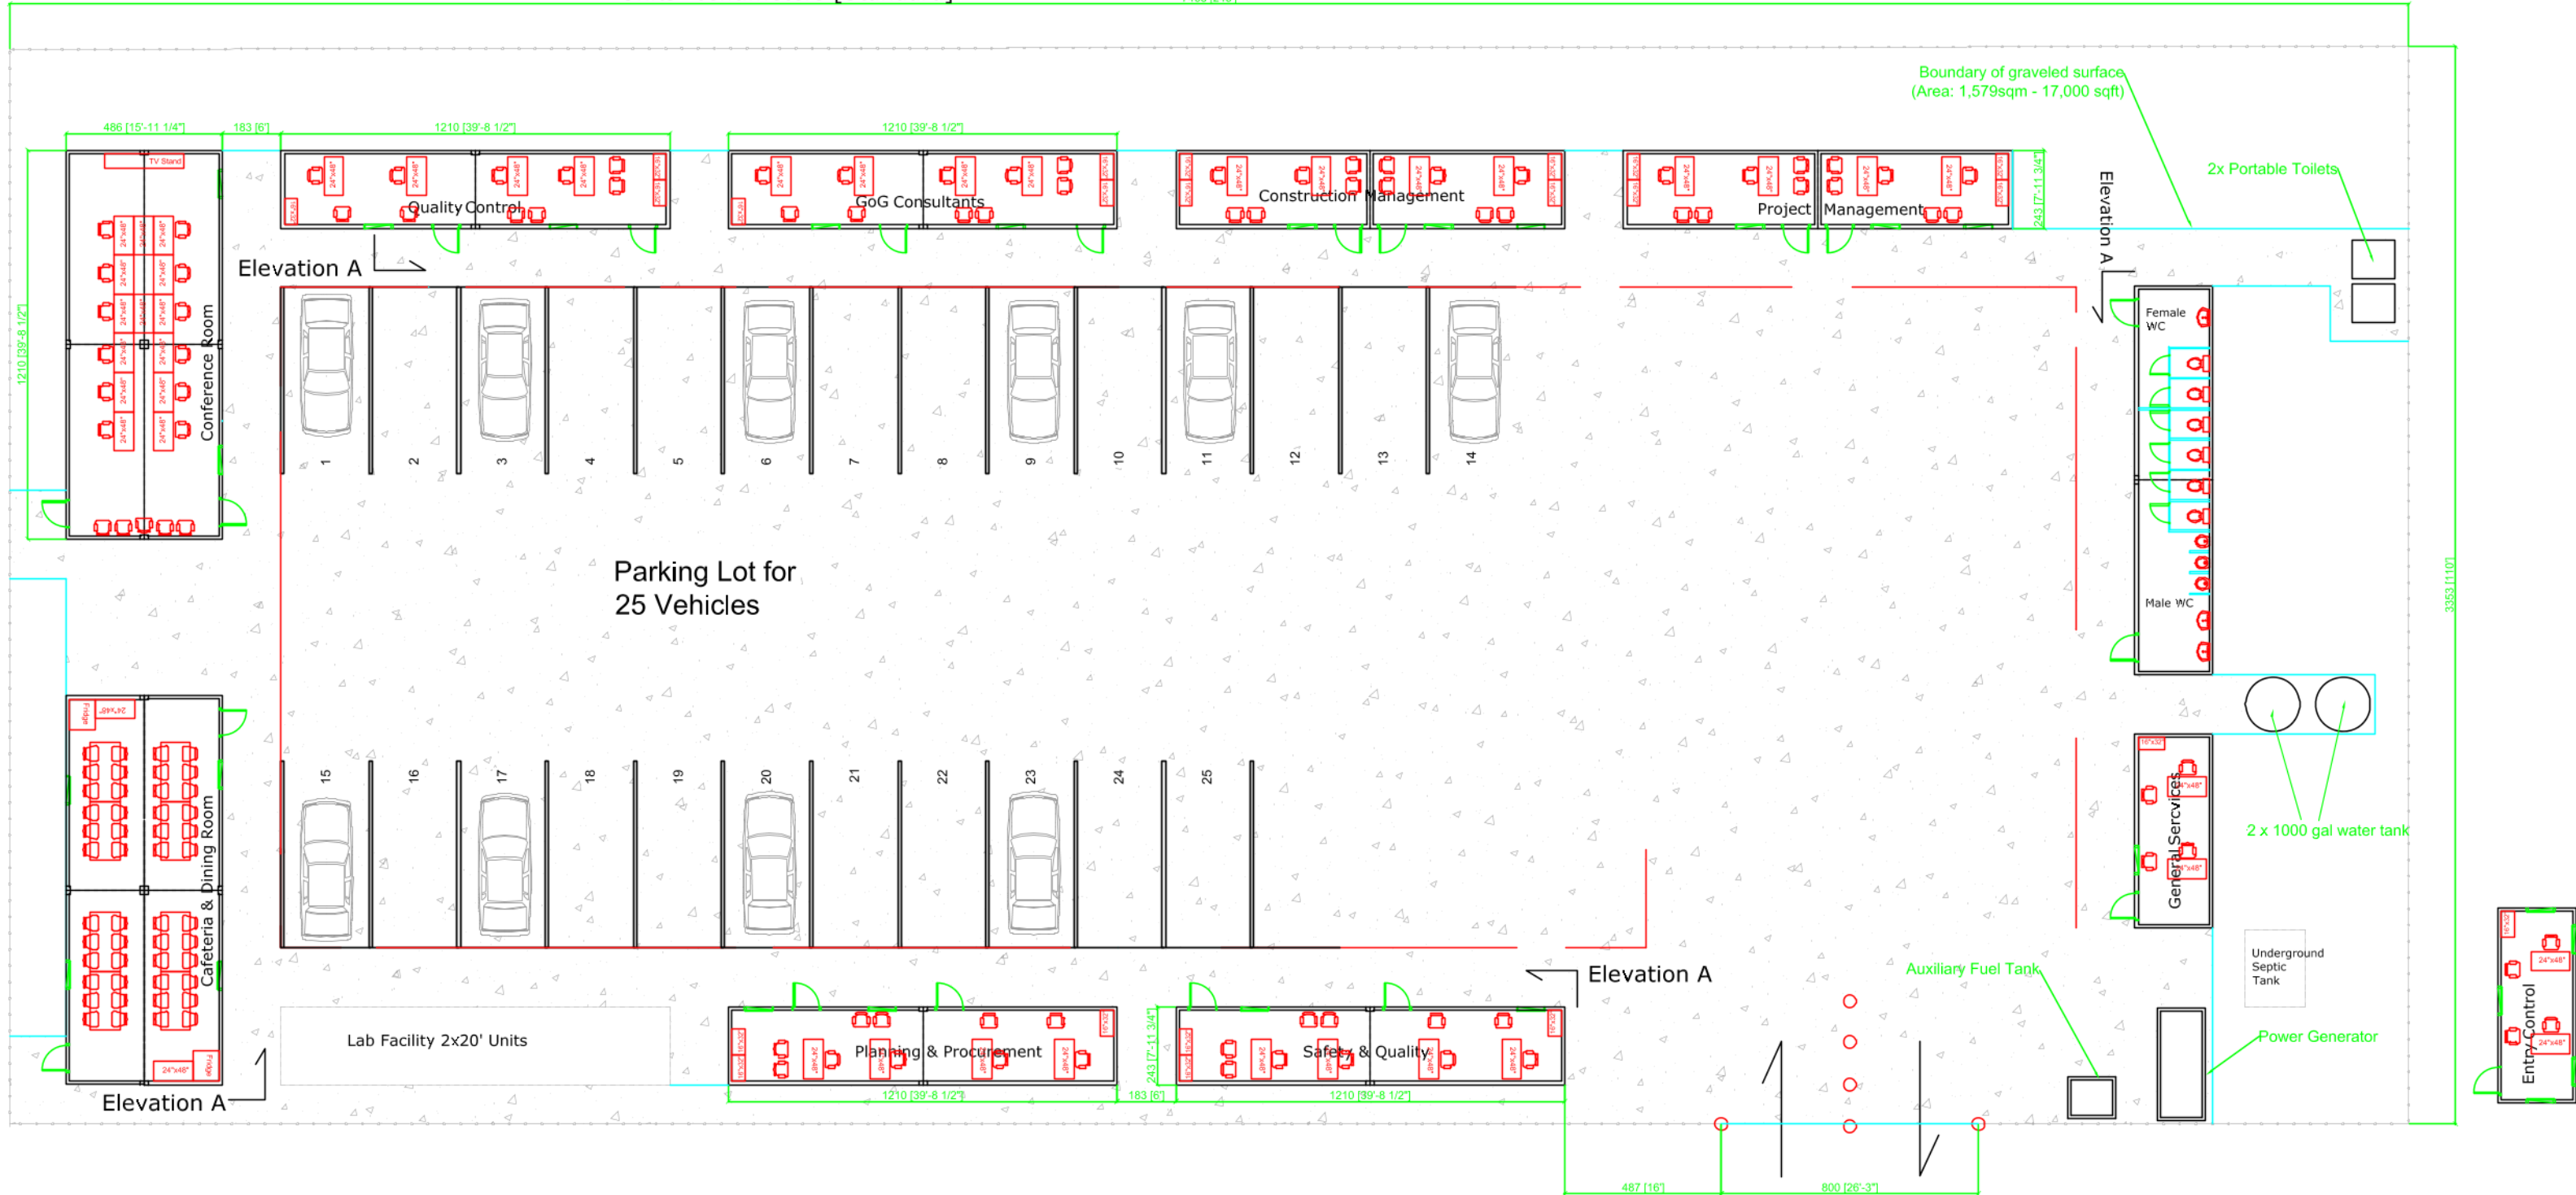

FENCE WITH 1m HIGH SNAKE GUARD

